




STANFORD RESEARCH INSTITUTE

MENLO PARK, CA

January 17,

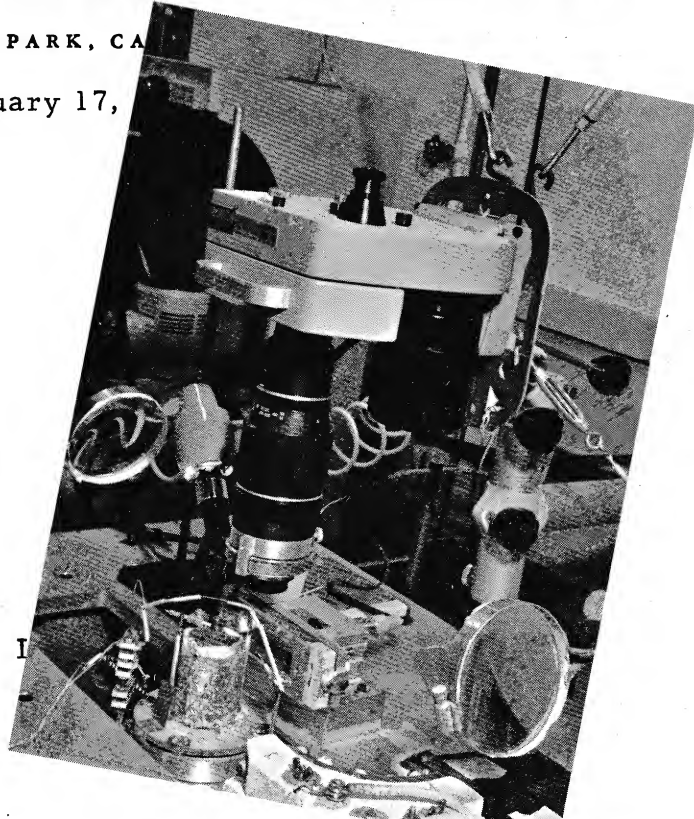

Red Lake Laboratories, Inc.
564 San Xavier
Sunnyvale, California

Gentlemen:

This is to thank you for the splendid cooperation given us by your technical staff.

In addition, I want to tell you how pleased we are with the performance of your Hycam high speed cameras. Both Hycams gave top performance at all speeds within their limits despite the extreme climatic temperature and humidity ranges under which they were operated.

The consistent brilliance and clarity of the images proved especially useful during our high speed macro-close-up sequences when we were measuring the trajectory and velocity of dynamic aerosols.

You might like to know that many of the films were made with the camera suspended from guy wires. Apparently the Hycam works equally well in any orientation. We were photographing straight down during some of our experiments.

Thanks again.

Yours very truly,

Zev Pressman
Research Engineer



**VETERANS ADMINISTRATION
HOSPITAL**

FULTON ST
DURHAM,
June

HYCAM



MODEL K1001

High Speed Motion Picture Camera

MANUFACTURED BY

RED LAKE LABS, INC.
SANTA CLARA, CALIF.

PAT. (ENDING
MADE IN U.S.A.

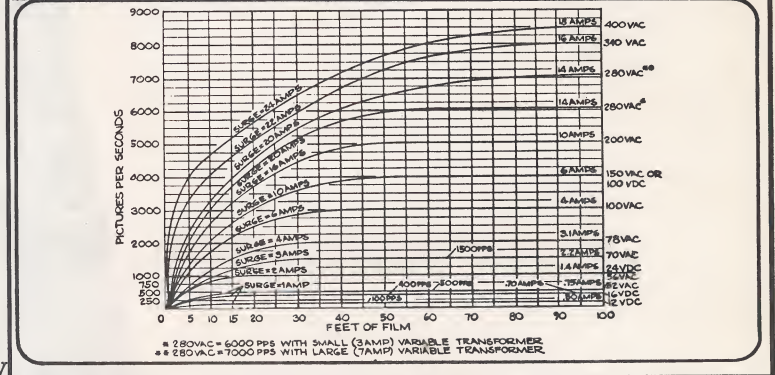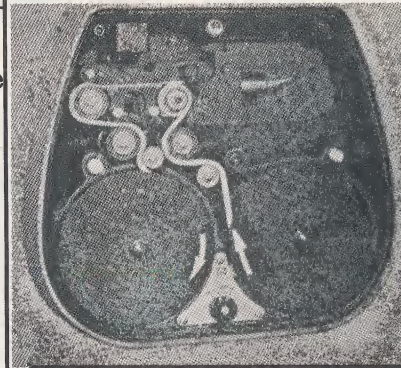

President
Red Lake Laboratories, Inc.
2971 Cowwin Drive
Santa Clara, Calif.

Dear Sir,

This letter is being written to express my
your company. Recently we acquired a Hy
first two rolls encountered some difficulty with film slipping in the camera.
I immediately placed a collect call to your concern and talked to Mr. Whitley,
your chief engineer. He patiently explained the many things that could be
causing our difficulties and offered to check over the camera as quickly as
possible. Rather than tie up the camera I decided to check over some of
the things he had mentioned and try the camera again. In the interim, Mr.
Bill Gray, your sales manager, called to see if there was anything he could
do to help us and offered to lend us a camera while ours was being serviced.
While I was talking to him, our latest run of film was coming through the processor
and I told him that it seemed to be all right. It was then that we decided that
the film gate had not been pushed down properly by one of my men. I told
Mr. Gray that we would make another run to see if all was working well. A
few hours later he called me after we had made another successful run.

What I am trying to convey in this rambling letter is that your cooperative attitude at Red Lake is a refreshing change from that of many companies today. I want to go on record as saying that I can unqualifiedly recommend your Hycam to other members of the medical photographic profession and I feel that you should go far in our field. The results we have been obtaining since we learned how to properly thread the film have been excellent. This coupled with your type of service, in my opinion, makes this camera an outstanding piece of equipment.

Again my compliments to you and your colleagues.

Sincerely yours,

Leonard M. Hart

LEONARD M. HART
Chief, Medical Illustration Service

Send me information on:

HYCAM 100' Model ☐

HYCAM 400' Model ☐

Timing Light Generator ☐

Have Salesman Call ☐
(no obligation)

Phone () _____

No
Postage Stamp
Necessary
If Mailed in the
United States

Postage
Will be Paid
by
Addressee

BUSINESS REPLY MAIL

PERMIT NUMBER 309 — SANTA CLARA, CALIFORNIA

RED LAKE LABS., INC.

2971 Corvin Drive

Santa Clara, California

Attn: Robert D. Shoberg



RED LAKE LABS., INC.
2971 Corvin Drive
SANTA CLARA, CALIFORNIA (95051)
(Area Code 408)739-1698

CONSUMER NET PRICE LIST

JANUARY 1, 1965

USE THESE MODEL NUMBERS & SPECIFICATIONS FOR ORDERING INFORMATION

Model K2001	HYCAM, HIGH SPEED MOTION PICTURE CAMERA, 16mm x 100' capacity, 100 to 8500 pictures per second, complete with event synchronizer, cut-off switch, 1/2.5 shutter, single timing light assembly, takes "C" mount lenses of any focal length, has sprocket, prism, and shutter on one shaft, with power cord and connectors. Resolution: Center, 68 lines/mm vertical and horizontal. Edges, 56 lines/mm vertical and horizontal. Wt. 13 lbs.	\$1295.00
Model K20S1	HYCAM, HIGH SPEED MOTION PICTURE CAMERA, 16mm x 100' capacity, 10 to 8500 pictures per second, complete with event synchronizer, cut-off switch, 1/2.5 shutter, single timing light assembly, speed reducer, takes "C" mount lenses of any focal length, has sprocket, prism and shutter on one shaft, with power cord and connectors. Resolution: Center 68 lines/mm vertical and horizontal. Edges, 56 lines/mm vertical and horizontal. Wt. 14 lbs.	\$1145.00
Model K2001A	HYCAM, HIGH SPEED MOTION PICTURE CAMERA, 16mm x 100' capacity, 200 to 17,000 pictures per second, com- plete with event synchronizer, cut-off switch, 1/2.5 shutter, single timing light assembly, takes "C" mount lenses of any focal length, has 16 sided prism, sprocket and shutter on one shaft, with 2 aperture masks for obtaining 1/2 frame 16mm with one mask and true 8mm with other mask, with power cord and connectors. Resolution: Center, 68 lines/mm vertical and horizontal. Edges, 56 lines/mm vertical and horizontal. Wt. 13 lbs.	\$1145.00
Model K20S1A	HYCAM, HIGH SPEED MOTION PICTURE CAMERA, 16mm x 100' capacity, 20 to 17,000 pictures per second, com- plete with event synchronizer, cut-off switch, 1/2.5 shutter, single timing light assembly, has speed reducer, takes "C" mount lenses of any focal length, has 16 sided prism, sprocket, and shutter on one shaft, with 2 aperture masks for obtaining 1/2 frame 16mm with one mask and true 8mm with other mask, with power cord and connectors. Resolution: Center, 68 lines/mm vertical and horizontal. Edges, 56 lines/mm vertical and horizontal. Wt. 14 lbs.	\$1595.00
Model K2004E	HYCAM, HIGH SPEED MOTION PICTURE CAMERA, 16mm x 400' capacity, 100 to 10,000 pictures per second, with electronic (SCR) speed control for 1% frame rate regulation after acceleration from 100 to 5000 pictures per second, com- plete with event synchronizer, cut-off switch, 1/2.5 shutter, double timing light assembly, film footage counter, with Y cord for remote control, takes "C" mount lenses of any focal length, has sprocket, prism, and shutter on one shaft, with power cord and connectors. Resolution: Center, 68 lines/mm vertical and horizontal. Edges, 56 lines/mm vertical and horizontal. Wt. 30 lbs.	\$2330.00

RED LAKE LABS., INC.

Model K20S4E	HYCAM, HIGH SPEED MOTION PICTURE CAMERA, 16mm x 400' capacity, 10 to 10,000 pictures per second with electronic (SCR) speed control for 1% frame rate regulation after acceleration from 10 to 5000 pictures per second, com- plete with event synchronizer, cut-off switch 1/2.5 shutter, double timing light assembly, film footage counter with Y cord for remote control, speed reducer, takes "C" mount lenses of any focal length, has sprocket, prism and shutter on one shaft, with power cord and connectors. Resolution: Center, 68 lines/mm vertical and horizontal. Edges, 56 lines/mm vertical and horizontal. Wt. 32 lbs.	\$2580.00
Model K2004AE	HYCAM, HIGH SPEED MOTION PICTURE CAMERA, 16mm x 400' capacity, 200 to 20,000 pictures per second, with electronic (SCR) speed control for 1% frame rate regulation after acceleration from 200 to 10,000 pictures per second, complete with event synchronizer, cut-off switch, 1/2.5 shutter, double timing light assembly, film footage counter, with Y cord for remote control, takes "C" mount lenses of any focal length, has 16 sided prism, sprocket and shutter on one shaft, with 2 aperture masks for obtaining a 1/2 frame 16mm with one mask and true 8mm with the other mask, with power cord and connectors. Resolution: Center, 68 lines/mm vertical and horizontal. Edges, 56 lines/mm vertical and horizontal. Wt. 30 lbs.	\$2480.00
Model K20S4AE	HYCAM, HIGH SPEED MOTION PICTURE CAMERA, 16mm x 400' capacity, 20 to 20,000 pictures per second with electronic (SCR) speed control for 1% frame rate regulation after acceleration from 20 to 10,000 pictures per second, complete with event synchronizer, cut-off switch, 1/2.5 shutter, double timing light assembly, film footage counter, with Y cord for remote control, speed reducer, takes "C" mount lenses of any focal length, has 16 sided prism, sprocket, and shutter on one shaft, with 2 aperture masks for obtaining a 1/2 frame 16mm with one mask, and true 8mm with other mask, with power cord and connectors. Resolution: Center, 68 lines/mm vertical and horizontal. Edges, 56 lines/mm vertical and horizontal. Wt. 32 lbs.	\$2730.00

FILM COMPARTMENT AND TRANSPORT SECTIONS

Model K20M1	HYCAM 100' FILM COMPARTMENT AND TRANSPORT SECTION, complete 100' camera <u>without optical head</u> , with event synchronizer, cut-off switch, power cord and connectors. Accepts all optical heads. Wt. 10 lbs.	\$575.00
Model K2SM1	HYCAM 100' FILM COMPARTMENT AND TRANSPORT SECTION, complete 100' camera with speed reducer, <u>without optical head</u> , with event synchronizer, cut-off switch, power cord and connectors. Accepts all optical heads. Wt. 11 lbs.	\$725.00

RED LAKE LABS., INC.

Model K2OM4E HYCAM 400' FILM COMPARTMENT AND TRANSPORT SECTION, complete 400' camera, without optical head, has electronic (SCR) speed control for 1% frame rate regulation, with event synchronizer, cut-off switch, film footage counter, with Y cord for remote control. Accepts all optical heads. However, optical heads without the speed sensor must have speed sensor installed at factory to obtain regulation (charge for this is \$60.00). Wt. 27 lbs. \$1550.00

Model K2SM4E HYCAM 400' FILM COMPARTMENT AND TRANSPORT SECTION, complete 400' camera with speed reducer, without optical head, has electronic (SCR) speed control for 1% frame rate regulation, with event synchronizer, cut-off switch, film footage counter, with Y cord for remote control. Accepts all optical heads. However, optical heads without the speed sensor must have speed sensor installed at factory to obtain regulation (charge for this is \$60.00). Wt. 29 lbs. \$1800.00

OPTICAL HEADS

Model K2OH HYCAM OPTICAL HEAD, 16mm full frame with 1/2.5 shutter, single timing light assembly, takes "C" mount lenses, has sprocket, prism, and shutter on one shaft. Fits all 100' film compartments and transport sections. Resolution: Center, 68 lines/mm vertical and horizontal. Edges, 56 lines/mm vertical and horizontal. \$720.00

Model K2OHA HYCAM OPTICAL HEAD, 1/2 frame 16mm or 8mm with 1/2.5 shutter, single timing light assembly, takes "C" mount lenses, has 16 sided prism, sprocket, and shutter on one shaft, with two aperture masks for obtaining 1/2 frame 16mm with one mask and true 8mm with other mask. Fits all 100' film compartments and transport sections. Resolution: Center, 68 lines/mm vertical and horizontal. Edges, 56 lines/mm vertical and horizontal. \$870.00

Model K2OHE HYCAM OPTICAL HEAD, with installed electronic speed sensor, 16mm full frame with 1/2.5 shutter, double timing light assembly, takes "C" mount lenses, has sprocket, prism, and shutter on one shaft. Fits all film compartments and transport section. Resolution: Center, 68 lines/mm vertical and horizontal. Edges, 56 lines/mm vertical & horizontal. \$805.00

Model K2OHA E HYCAM OPTICAL HEAD, with installed electronic speed sensor, 1/2 frame 16mm or 8mm with 1/2.5 shutter, double timing light assembly, takes "C" mount lenses, has 16 sided prism, sprocket, and shutter on one shaft, with 2 aperture masks for obtaining 1/2 frame 16mm with one mask and true 8mm with other mask. Fits all film compartments and transport sections. Resolution: Center, 68 lines/mm vertical and horizontal. Edges, 56 lines/mm vertical and horizontal. \$955.00

RED LAKE LABS., INC.

PRISM/SHUTTER/SPROCKET KITS

K2P/S/S/8E	8 sided prism, sprocket, and shutter shaft assembly, with electronic speed sensor provision, including bearings and full frame 16mm aperture mask. Fits all optical heads.	\$300.00
K2P/S/S/16E	16 sided prism, sprocket, and shutter shaft assembly, with electronic speed sensor provision, including bearings and 3 masks. One for use in upper gate, one for obtaining 1/2 frame 16mm and one for obtaining true 8mm. Fits all optical heads.	\$450.00

SHUTTERS FOR FULL FRAME 16MM HycAM

K2S-1/2.5	Shutter.....\$18.50	K2S-1/20	Shutter.....\$22.50
K2S-1/5	Shutter.....\$18.50	K2S-1/50	Shutter.....\$22.50
K2S-1/10	Shutter.....\$22.50	K2S-1/100	Shutter.....\$22.50

SHUTTERS FOR 1/2 FRAME 16MM & 8MM HycAM

K2S8-1/2.5	Shutter.....\$24.50	K2S8-1/20	Shutter.....\$24.50
K2S8-1/5	Shutter.....\$24.50	K2S8-1/50	Shutter.....\$24.50
K2S8-1/10	Shutter.....\$24.50	*K2S8-1/100	Shutter.....\$24.50
		*(for use with 8mm only)	

TIMING LIGHT ASSEMBLIES AND GENERATORS

K2DTL	Extra timing light assembly installed in camera at time of manufacture.	\$25.00
K2TL	Parts for extra timing light assembly to be installed in the field by customer.	\$25.00
K2T	Labor and parts for installing extra timing light assembly at factory after manufacturing, plus transportation.	\$50.00
RLTLG-3	Milli-Mite timing light generator with 10, 100, 1000 cycles per second, complete with battery. Wt. 4 lbs.	\$210.00
RLTLG-3DC	Milli-Mite timing light generator with 10, 100, 1000 cycles per second, with D.C. power supply 110V AC in, with power cord. Wt. 5 lbs.	\$284.00
RLDC-2	DC Power Supply 110V AC in, fixed 40V DC out. Remove battery and use with Milli-Mite timing light generator, model TLG-3, with power cord. Wt. 2½ lbs.	\$76.50
RLMMTLG-2	Micro Milli-Mite timing light generator, high G loads, 10, 100, 1000 cycles per second. Wt. 1 lb.	\$340.00

FRAME RATE CONTROLSSPEED REDUCER FOR INSTALLATION WHEN STANDARD CAMERAS ARE RETURNED TO FACTORY

RLSR-1	Speed reducer for 100' HYCAM, when using DC to motor, frame rate can be varied from 10 to 300 frames per second with full frame 16mm, and 20 to 600 frames per second when used with 1/2 frame 16 or 8mm camera.	\$175.00
RLSR-4	Speed reducer for 400' HYCAM. For frame rates from 10 to 100 fps with full frame 16 and 20 to 200 fps, when used with a 1/2 frame 16mm or 8mm.	\$275.00

VARIABLE AUTO TRANSFORMERS

RL216	Powerstat, model #216 (modified) 115V AC in, 0 to 280V AC out, for use with 100' HYCAM to obtain speeds infinitely variable from 500 to 7000fps. Wt. 10 lbs.	\$37.50
RL236-1M	Powerstat, 115V AC in, 0 to 300V AC out. Operates both 100' and 400' HYCAMS to top rated speed, off 115V AC, with handle, manufactured by Superior Electric Company. Wt. 23 lbs.	\$160.00

DC RECTIFIER

RLDC-1	DC power supply, full wave, 115V AC in, 0 to 115V DC out. For use with 100' HYCAM only. Infinitely variable from 100 to 5000fps without speed reducer, 10 to 300 fps with speed reducer. Wt. 4½ lbs.	\$112.50
--------	--	----------

LENSESOBJECTIVE LENSES IN "C" MOUNT, FOCUSING

RLL-½	Lens, 12.5mm FL, f/1.9 in focusing mount, "C" mount	\$94.50
RLL-1	Lens, 1 inch FL, f/1.4 in focusing mount, "C" mount	\$67.60
RLL-2	Lens, 2 inch FL, f/1.9 in focusing mount, "C" mount	\$70.75
RLL-3	Lens, 3 inch FL, f/1.9 in focusing mount, "C" mount	\$68.50
RLL-4	Lens, 4 inch FL, f/2.7 in focusing mount, "C" mount	\$99.50
RLL-6	Lens, 6 inch FL, f/4.5 in focusing mount, "C" mount	\$85.50
RLL-6A	Lens, 6 inch FL, f/3.8 in focusing mount, "C" mount	\$120.00

ADDITIONAL OBJECTIVE LENSES WHEN USED WITH PENTAX TO "C" MOUNT ADAPTER

RLL-135	Lens, 135mm FL, f/3.5 in focusing Pentax mount	\$89.50
RLL-8	Lens, 8 inch FL, f/3.5 in focusing Pentax mount	\$189.50

ADDITIONAL OBJECTIVE LENSES WHEN USED WITH PENTAX TO "C" MOUNT ADAPTER

(Continued)

RL-12	Lens, 12 inch FL, f/5 in focusing Pentax mount	\$279.50
RL-20	Lens, 20 inch FL, f/5 in focusing Pentax mount	\$350.00
RL-40	Lens, 40 inch FL, f/8 in focusing Pentax mount, supplied with tripod for lens.	\$1195.00

OSCILLO LENSES IN PENTAX MOUNT, FOCUSING

KLOSL-55	Lens, 55mm FL, f/1.8 in focusing Pentax mount	\$94.50
KLOSL-85	Lens, 85mm FL, f/1.8 in focusing Pentax mount	\$134.50
KLOSL-105	Lens, 105mm FL, f/2.8 in focusing Pentax mount (Above 3 lenses can be used as objective lenses when used with Pentax to "C" mount adapters.)	\$89.50

LENS ADAPTERS AND EXTENSION TUBES"C" MOUNT EXTENSION TUBES

RLXTC- $\frac{1}{4}$	$\frac{1}{4}$ inch.....\$6.00	RLXTC-2	2 inch.....\$ 8.00
RLXTC- $\frac{1}{2}$	$\frac{1}{2}$ inch.....\$6.00	RLXTC-4	4 inch.....\$10.00
RLXTC- $\frac{3}{4}$	$\frac{3}{4}$ inch....\$6.00	RLXTC-6	6 inch.....\$12.00
RLXTC-1	1 inch.....\$6.00	RLXTC-8	8 inch.....\$14.00

PENTAX MOUNT EXTENSION TUBES

RLXTCO- $\frac{1}{4}$	Extension tube for oscillo attachment- $\frac{1}{4}$ inch	\$ 6.50
RLXTCO- $\frac{1}{2}$	Extension tube for oscillo attachment- $\frac{1}{2}$ inch	\$ 6.50
RLXTCO-1	Extension tube for oscillo attachment-1 inch (Other lengths available on request.)	\$ 6.50

LENS ADAPTERS

RLCFA-1	Adapter to use Fastax lens on HYCAM "C" mount	\$32.00
RLCSA-1	Adapter to use Kodak "S" mount lens on HYCAM "C" mount	\$22.00
RLFAC-1	Adapter to use Fairchild high speed camera lens on HYCAM "C" mount	\$32.00
RLPCA-1	Adapter to use Pentax lens on HYCAM "C" mount	\$32.00

RED LAKE LABS., INC.

OSCILLO AND STREAK ATTACHMENT

KLOSA-1	Oscillo attachment, adapter to take Pentax type lenses, including film guide roller assembly, used with any HYCAM.	\$85.00
KLOSA-2	Oscillo attachment, adapter to take Fastax lenses (50mm and up) including film guide roller assembly for use with any HYCAM	\$85.00
KLSA-1	Lower gate and streak attachment for placing adjustable slit at the film plane. For use with any HYCAM.	\$82.50

FIDUCIAL MARKERS (INTERCHANGEABLE WITH OPEN APERTURE MASK)

KLFM-1	Fiducial marker for putting cross hairs on the film. For use with 16mm full frame HYCAM.	\$25.00
KLFM-2	Fiducial marker for putting short lines into the frame from all four sides, with center open. For use with 16mm full frame HYCAM.	\$45.00
KLFM-3	Fiducial marker for putting cross hairs on the film. For use with $\frac{1}{2}$ frame 16mm HYCAM.	\$25.00
KLFM-4	Fiducial marker for putting cross hairs on the film. For use with 8mm HYCAM.	\$25.00
KLFM-5	Fiducial marker for putting short lines into the frame from all four sides, with center open. For use with $\frac{1}{2}$ frame 16mm HYCAM.	\$45.00
KLFM-6	Fiducial marker for putting short lines into the frame from all four sides, with center open. For use with 8mm HYCAM.	\$45.00

ACCESSORIES FOR HYCAM

RLTRI-1	<u>TRIPOD</u> , geared pan head, 90 degrees vertical tilt. Manufactured by Quick-Set. Wt. 13 lbs.	\$130.00
RLTRI-2	<u>TRIPOD</u> , heavy duty with hand crank elevator, with geared tilt to 90 degrees, firm locks for all adjustments. For use with 400' HYCAM. Manufactured by Quick-Set. Wt. 27 lbs.	\$315.00
RLEM	<u>EXPOSURE METER</u> , 3/21 degree, reflective, manufactured by Minneapolis Honeywell.	\$99.50
RLLi-1	<u>LIGHTING UNIT</u> , 1000 watt quartz lamp with housing, stand and heat absorbing glass with bracket. Operates from 115V line. Manufactured by Colortran.	\$175.00
RLLi-2	<u>LIGHTING UNIT</u> , including 750R lamp with alligator clamp, porcelain socket and switch in line.	\$ 11.00

ACCESSORIES FOR HYCAM


(Continued)

RLI-750-R	<u>LAMP</u> , (replacement)	\$ 4.50
KIMP-1	<u>MAGNETIC PICKUP</u> for electronic flash synchronizer, installed. For use with 16mm full frame HYCAM.	\$180.00
RLCC-1	<u>CARRYING CASE</u> for 100' HYCAM. Leatherette with polyurethane insert, with compartments for film, lenses, and other accessories.	\$ 56.00
RLF-41	<u>ADAPTER</u> to use 100' film spools in the 400' HYCAM. (To prevent film shatter at end of run.)	\$ 45.00
RLF-42	<u>ADAPTER</u> to use 200' film spools in the 400' HYCAM. (To prevent film shatter at end of run.)	\$ 45.00
KIOF4	<u>FILM SPOOL</u> , daylight loading, split reel, 16mm x 400' to accept Z core wound film. (For use above 8000 pictures per second.)	\$ 27.50
RLBXT-1	<u>BELLOWS EXTENSION</u> set for close up photography, Accepts Pentax type lenses. For use with any model HYCAM.	\$ 48.00
SERVICE	<u>CONVERSION</u> Install electronic speed sensor in old 100' optical heads. For use with 400' HYCAM.	\$ 60.00
SERVICE	<u>CHANGE</u> optical system from K1 to K2 high resolution system.	\$200.00

PRICES AND SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE.

ALL PRICES ARE F.O.B. SANTA CLARA, CALIFORNIA


DATED: JANUARY 1, 1965

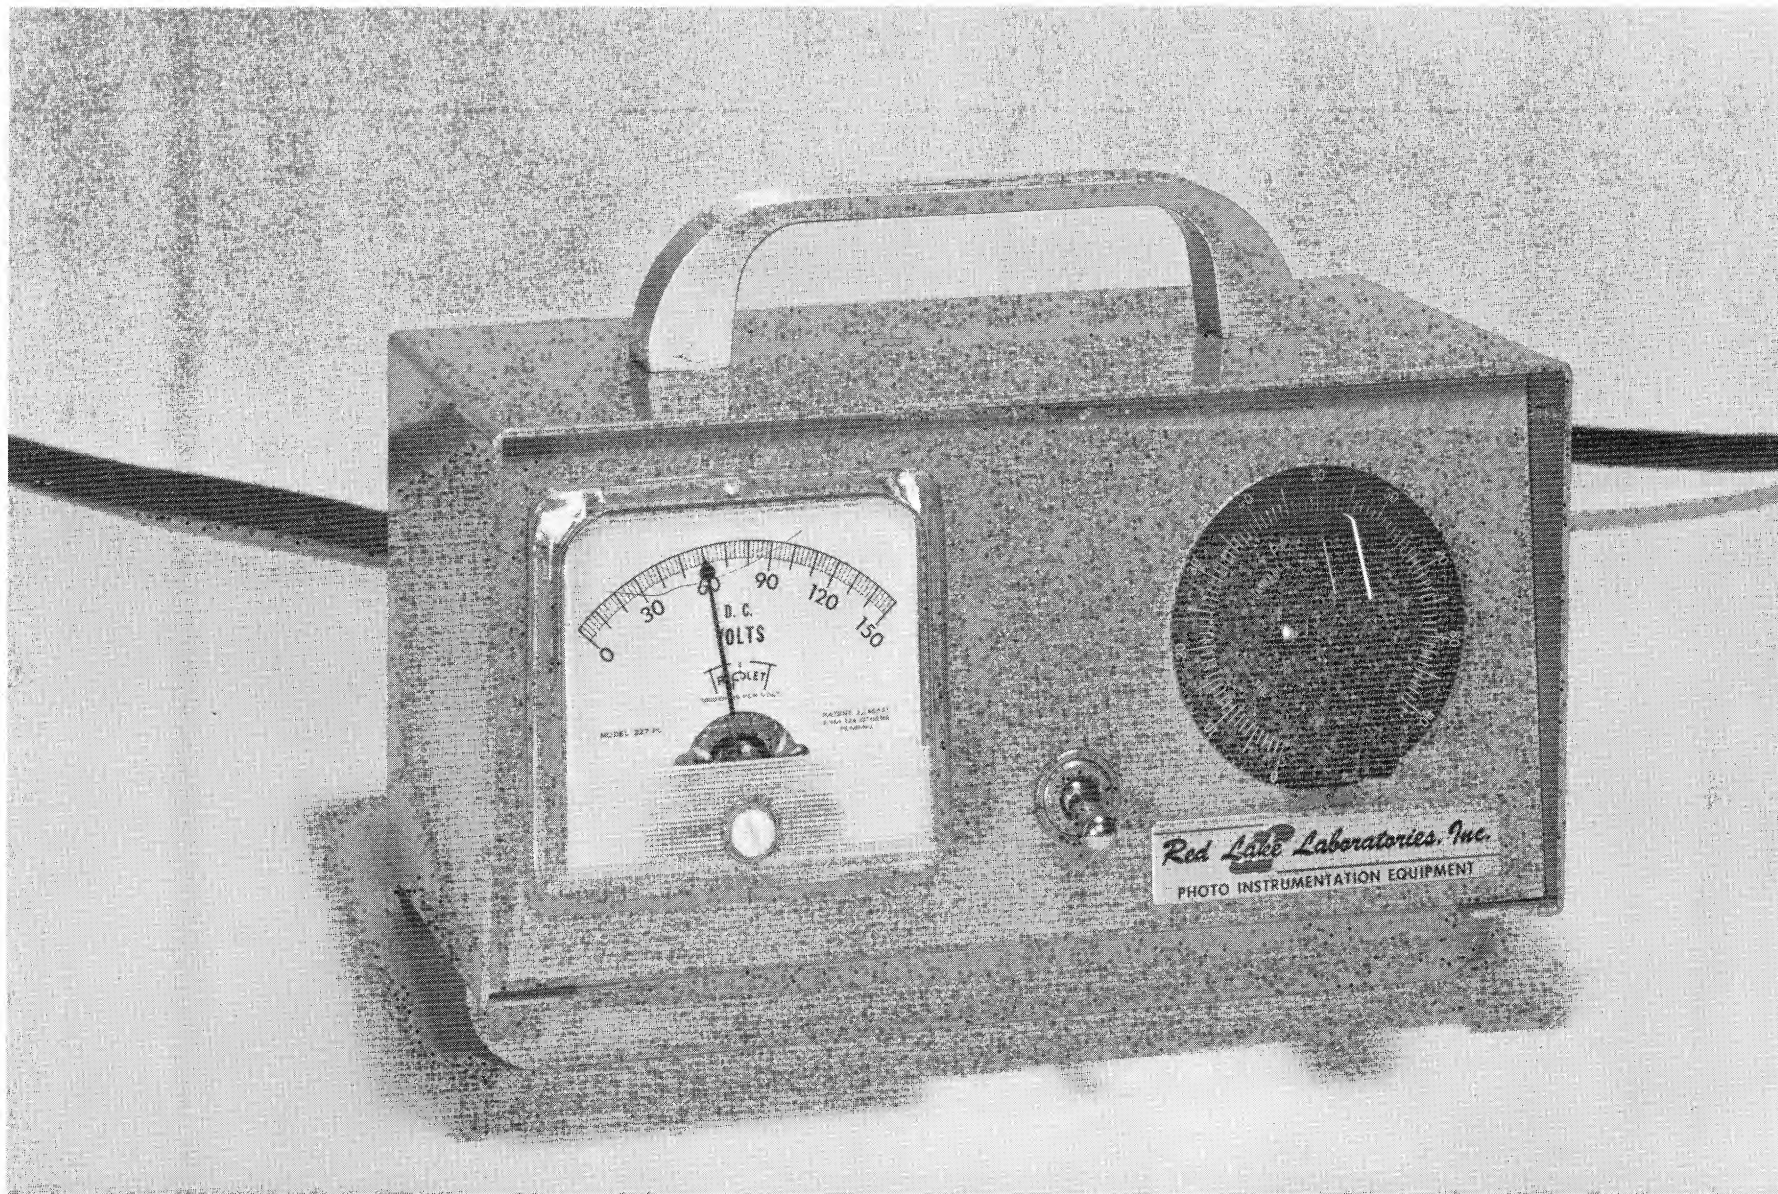

MODEL RLDC-1 DC RECTIFIER

This unit is for use with the 100' Hycam. It has a 110V AC input and 0 to 110V DC output with a 6 amp. capacity. It will regulate the frame rate from 100 to 4000 pps on the 16mm full frame Hycam and 200 to 8000 pps on the $\frac{1}{2}$ frame 16mm or 8mm. When the speed reducer is used the frame rate can be lowered to 10 and 20 pps. Voltage vs. frame rate information is supplied.

Manufactured by RED LAKE LABS., Santa Clara, California.

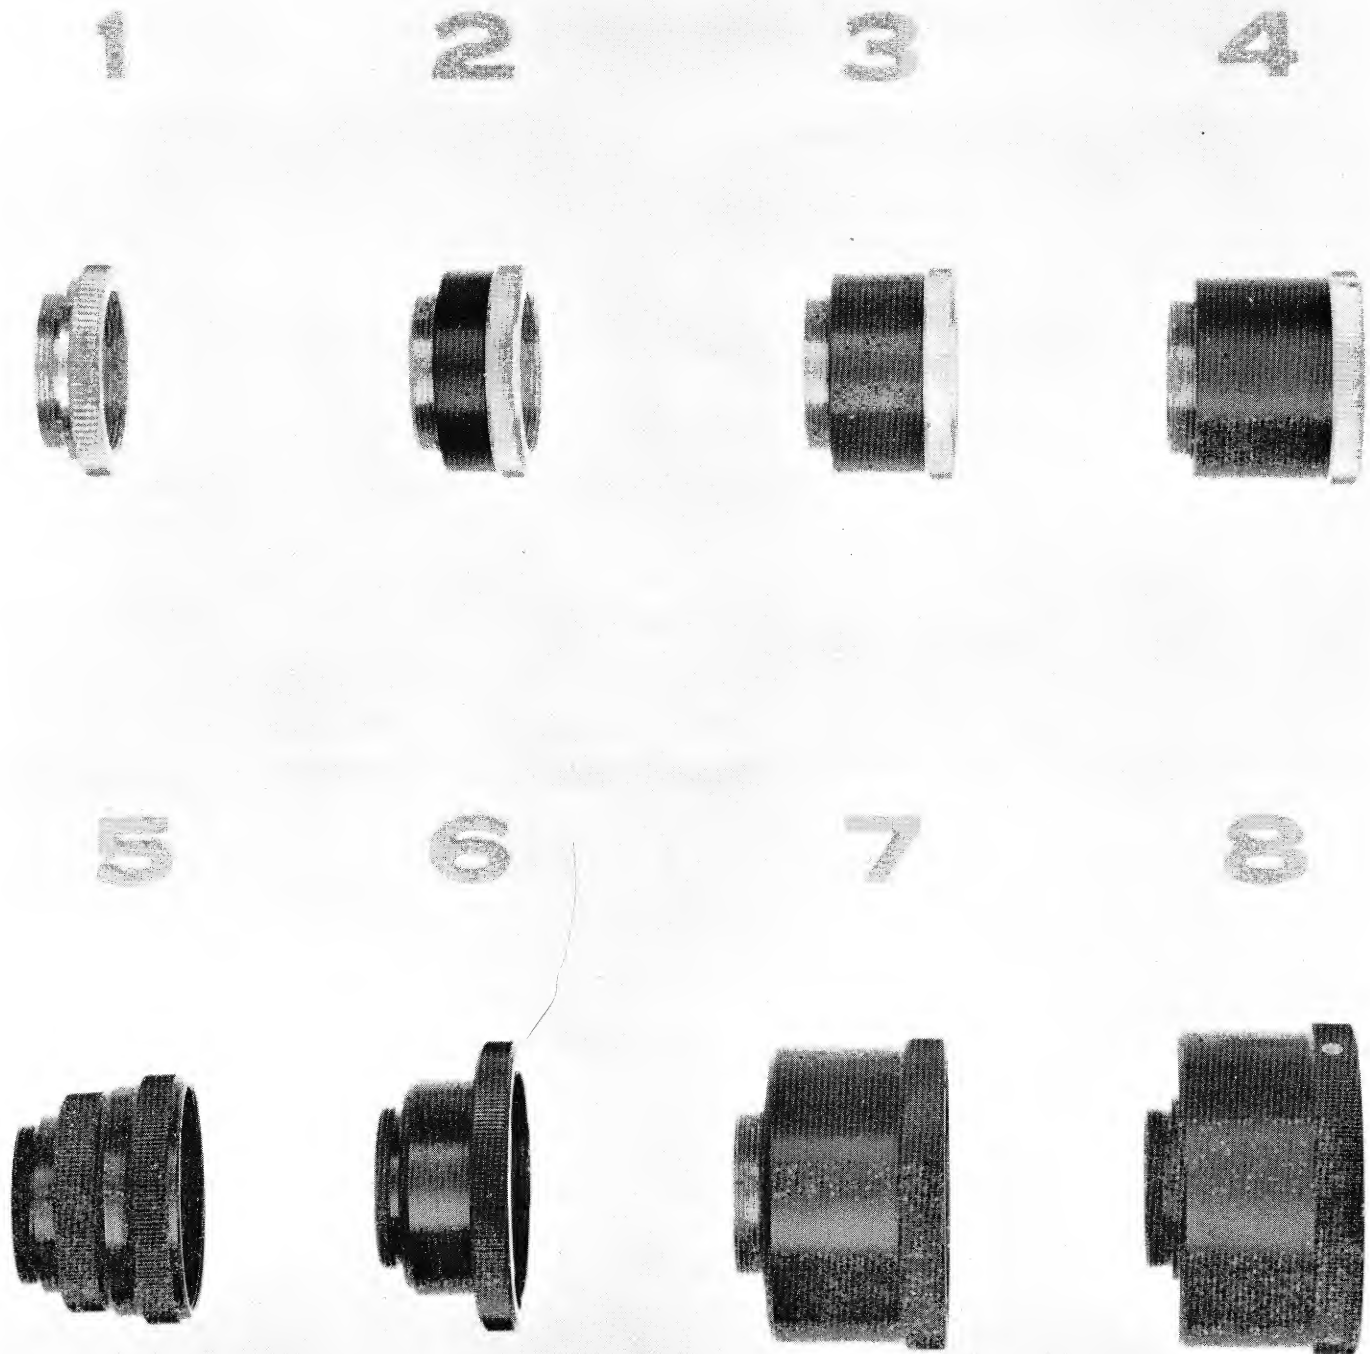

VARIOUS "C" MOUNT EXTENSION TUBES and ADAPTERS FOR POPULAR LENSES USED ON HYCAM


- | | |
|---|---|
| 1. $\frac{1}{4}$ " "C" mount extension tube | 2. $\frac{1}{2}$ " "C" mount extension tube |
| 3. $\frac{3}{4}$ " "C" mount extension tube | 4. 1" "C" mount extension tube |
| 5. Kodak "S" lens on Hycam "C" mount | 6. Fairchild HS lens on Hycam "C" mount |
| 7. Pentax lens on Hycam "C" mount | 8. Fastax lens on Hycam "C" mount |

Manufactured by RED LAKE LABS., Santa Clara, California.


HYCAM CAMERAS

STANDARD OF EXCELLENCE

among 16-mm high-
speed motion-picture
rotating-prism types



100-ft Model



400-ft Model

5 to 44,000 pictures per second

*** HIGHEST RESOLUTION**

Hycam pictures resolve 68 lines per millimeter both in the vertical and horizontal directions, giving the steadiest highest-quality images in the field.

*** WIDEST SPEED RANGE**

Various Hycam models have framing rates as low as 5 pictures per second and as high as 44,000 pps. 400-ft models have built-in electronic speed control for flat speed curves.

*** GREATEST FLEXIBILITY**

Full-frame, $\frac{1}{2}$ -frame, or $\frac{1}{4}$ -frame 16-mm quickly interchangeable with basic camera. Cine-oscillography, streak or time-lapse photography. Hycam can also be used as a motion-picture projector, uses c-mount lenses of all focal lengths.

*** LOWEST COST**

In spite of its superior performance, Hycam is about half the price of other 16-mm rotating-prism cameras.

FULL LINE OF ACCESSORIES

TIMING-LIGHT GENERATORS

POWER SUPPLIES

TRIPODS

EXPOSURE METERS

LIGHTING EQUIPMENT

LENSES & ADAPTERS

Red Lake Labs

**2971 CORVIN DRIVE
KIFER INDUSTRIAL PARK
SANTA CLARA, CALIFORNIA 95051
(408) - 739-1698**

OSCILLO AND STREAK ATTACHMENT

KIOSA-1	Oscillo attachment, adapter to take Pentax type lenses, including film guide roller assembly, used with any HYCAM.	\$85.00
KIOSA-2	Oscillo attachment, adapter to take Fastax lenses (50mm and up) including film guide roller assembly for use with any HYCAM	\$85.00
KISA-1	Lower gate and streak attachment for placing adjustable slit at the film plane. For use with any HYCAM.	\$82.50

FIDUCIAL MARKERS (INTERCHANGEABLE WITH OPEN APERTURE MASK)

KIFM-1	Fiducial marker for putting cross hairs on the film. For use with 16mm full frame HYCAM.	\$25.00
KIFM-2	Fiducial marker for putting short lines into the frame from all four sides, with center open. For use with 16mm full frame HYCAM.	\$45.00
KIFM-3	Fiducial marker for putting cross hairs on the film. For use with $\frac{1}{2}$ frame 16mm HYCAM.	\$25.00
KIFM-4	Fiducial marker for putting cross hairs on the film. For use with 8mm HYCAM.	\$25.00
KIFM-5	Fiducial marker for putting short lines into the frame from all four sides, with center open. For use with $\frac{1}{2}$ frame 16mm HYCAM.	\$45.00
KIFM-6	Fiducial marker for putting short lines into the frame from all four sides, with center open. For use with 8mm HYCAM.	\$45.00

ACCESSORIES FOR HYCAM

RLTRI-1	<u>TRIPOD</u> , geared pan head, 90 degrees vertical tilt. Manufactured by Quick-Set. Wt. 13 lbs.	\$130.00
RLTRI-2	<u>TRIPOD</u> , heavy duty with hand crank elevator, with geared tilt to 90 degrees, firm locks for all adjustments. For use with 400' HYCAM. Manufactured by Quick-Set. Wt. 27 lbs.	\$315.00
RLEM	<u>EXPOSURE METER</u> , 3/21 degree, reflective, manufactured by Minneapolis Honeywell.	\$99.50
RLLi-1	<u>LIGHTING UNIT</u> , 1000 watt quartz lamp with housing, stand and heat absorbing glass with bracket. Operates from 115V line. Manufactured by Colortran.	\$175.00
RLLi-2	<u>LIGHTING UNIT</u> , including 750R lamp with alligator clamp, porcelain socket and switch in line.	\$ 11.00

RED LAKE LABS., INC.

ACCESSORIES FOR HYCAM

(Continued)


RLI-750-R	<u>LAMP</u> , (replacement)	\$ 4.50
KIMP-1	<u>MAGNETIC PICKUP</u> for electronic flash synchronizer, installed. For use with 16mm full frame HYCAM.	\$180.00
RLCC-1	<u>CARRYING CASE</u> for 100' HYCAM. Leatherette with polyurethane insert, with compartments for film, lenses, and other accessories.	\$ 56.00
RLF-41	<u>ADAPTER</u> to use 100' film spools in the 400' HYCAM. (To prevent film shatter at end of run.)	\$ 45.00
RLF-42	<u>ADAPTER</u> to use 200' film spools in the 400' HYCAM. (To prevent film shatter at end of run.)	\$ 45.00
KIOF4	<u>FILM SPOOL</u> , daylight loading, split reel, 16mm x 400' to accept Z core wound film. (For use above 8000 pictures per second.)	\$ 27.50
RLBXT-1	<u>BELLOWS EXTENSION</u> set for close up photography, Accepts Pentax type lenses. For use with any model HYCAM.	\$ 48.00
SERVICE	<u>CONVERSION</u> Install electronic speed sensor in old 100' optical heads. For use with 400' HYCAM.	\$ 60.00
SERVICE	<u>CHANGE</u> optical system from K1 to K2 high resolution system.	\$200.00

PRICES AND SPECIFICATIONS SUBJECT TO CHANGE WITHOUT
NOTICE.

ALL PRICES ARE F.O.B. SANTA CLARA, CALIFORNIA

DATED: JANUARY 1, 1965

Red Lake Labs

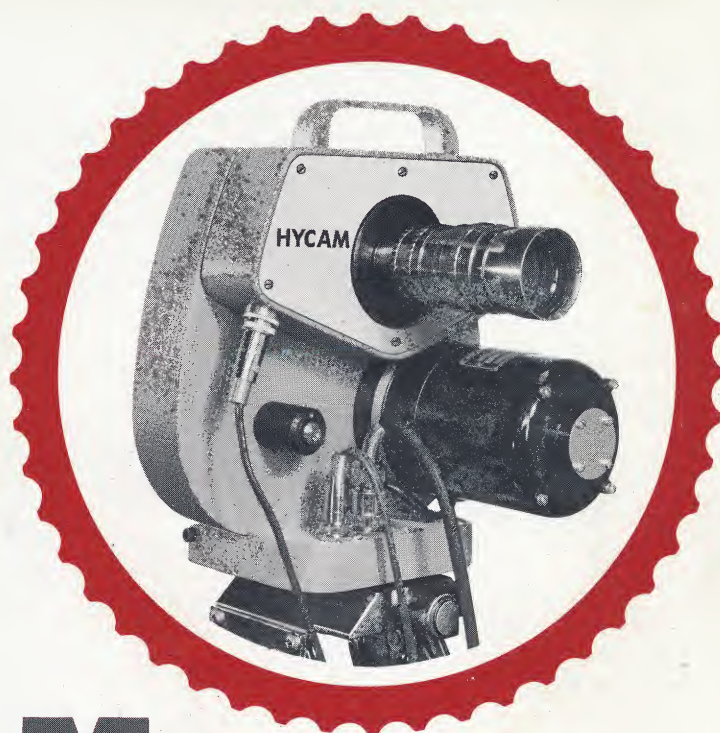

HYCAM

16-mm high-speed motion-picture camera

Pictures of previously unimagined quality and steadiness are produced in the Hycam Model K1001 at framing rates ranging from 10 to 8,500 pps.

Every feature, every accessory, every auxiliary developed and made useful in the field of high-speed cinematography is available to the Hycam owner at a price substantially less than elsewhere. And no other camera includes the full total of these features.

Basically, Hycam excellence and versatility stem from a totally new design. Hycam engineers, working from career-long experience in the photo-instrumentation field, went back to fundamentals and produced in the Hycam series a design of such straightforward simplicity as to solve a series of basic technical problems and reduce costs of production drastically, both at once.

The heart of the Hycam is a single shaft carrying the film-transport sprocket, the rotating-prism optical-compensating device, and the segmented shutter. Eliminating all gearing with its troublesome backlash and limiting the number of critical bearings to two, this advanced design concept not only produced the industry's steadiest picture and the industry's least expensive camera, but also opened the way for a myriad of simple approaches to other special features and capabilities.

These include:

- *Interchangeable prisms for 1/2-frame 16-mm or true 8-mm (with 20 to 17,000 pictures per second)*
- *Flat film gate for uniform resolution*
- *Interchangeable shutters permitting exposures as short as 1.17 microsec with full 16-mm frame height*
- *Usability of any c-mount lenses*
- *Availability of aperture-mask fiducial markers for putting crosshairs on film*
- *One timing light standard, second auxiliary timing light can be added*
- *Event-synchronizer and end-of-film cutoff switches standard*
- *Convertibility of basic mechanism between 100-foot, 400-foot, and 2000-foot cameras*
- *General mechanical simplicity, which permits maintenance or parts changing with simple standard tools*
- *Availability of auxiliary units for cine-oscillography, streak photography, and electronic flash synchronization*

more

HYCAM FEATURES

INTERCHANGEABLE SHUTTERS

Standard gives exposure ratio of 1/2.5 (at 1,000 pps, shutter speed is 1/2500 sec.). Other sizes available down to 1/100 for a 1.17 microsec exposure at 8,500 pps without reduction in frame height.

TIMING LIGHT

Circuitry and external connections. Single light puts marks on one edge of film. Auxiliary kit adds second timing light for opposite side of film.


CROSSHAIRS

Can be added right here on the aperture mask.

C-MOUNT LENSES

Use of inexpensive and readily available c-mount lenses of any focal length adds to Hycam versatility.

FRONT

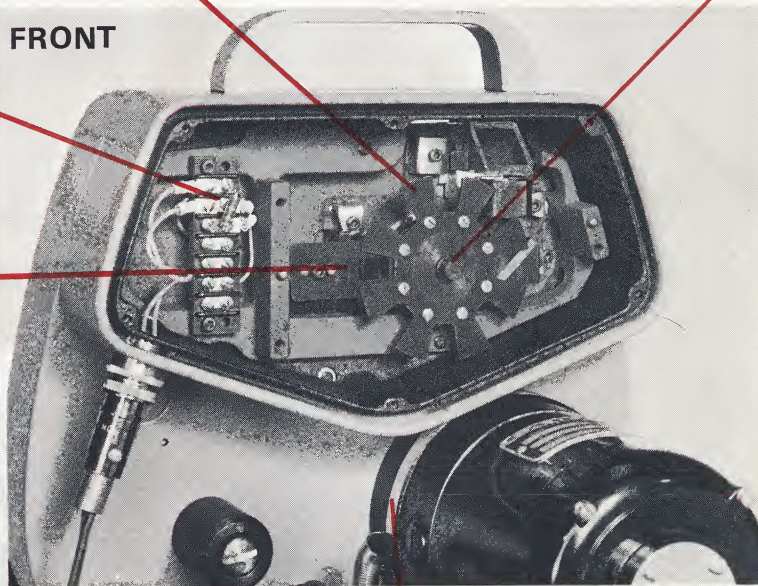

INTERCHANGEABILITY

100-foot unit shown here. Optical head is quickly interchanged between 100-, 400-, and 2,000-ft film transports. (See illustration at top of opposite page.)

SINGLE UNIVERSAL MOTOR

Handles entire speed range from 10 to 8,500 pps, depending on voltage input. For low frame rates, d-c is used. At higher rates, either a-c or d-c can be used.

FULLY GUARANTEED

90-day guarantee: If, for any reason, you are not completely satisfied with any Red Lake product within 90 days, you may return it for full credit. *One-year guarantee* covers any defect in workmanship or material.

Red Lake Labs, Inc.


PHOTO INSTRUMENTATION EQUIPMENT

Products the User Likes

SIN
Carr
tatin
mech

GLE SHAFT

es segmented shutter, film sprocket, and ro-
g prism. This is the heart of the Hycam
anism.

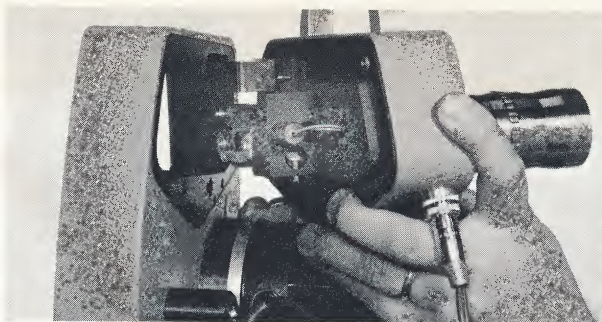

Release of three screws permits rapid removal of optical head from film transport



REAR

FLAT FILM GATE

Pictures look like intermittent frames.

SMOOTH-START CLUTCH

Centrifugal clutch brings film to speed without expensive voltage-control devices.

FILM COMPARTMENT

Minimizes film chips at end of run.

SPEED CURVES. See chart, page 4


VIEWING AND FOCUSING

Done by a direct through-the-lens viewer and focuser directly on the film. Darkslide and external shutter positioner provided.

EVENT SYNCHRONIZER


Triggers the event at pre-set point in film. Second switch interrupts motor power at end of film.

PATENT APPLIED FOR

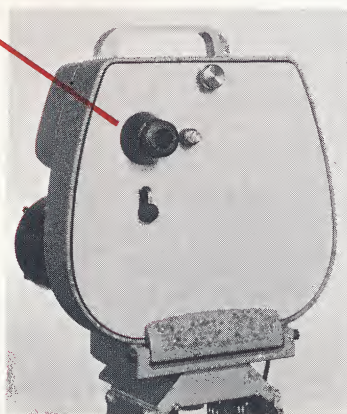


11 Corwin Drive • Santa Clara, California
739-1698 (408)

SPEED CURVES

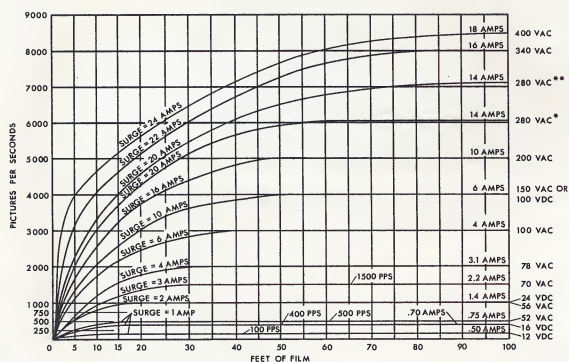

* 280 VAC = 6000 PPS WITH SMALL (3 AMP) VARIABLE TRANSFORMER
 ** 280 VAC = 7000 PPS WITH LARGE (7 AMP) VARIABLE TRANSFORMER

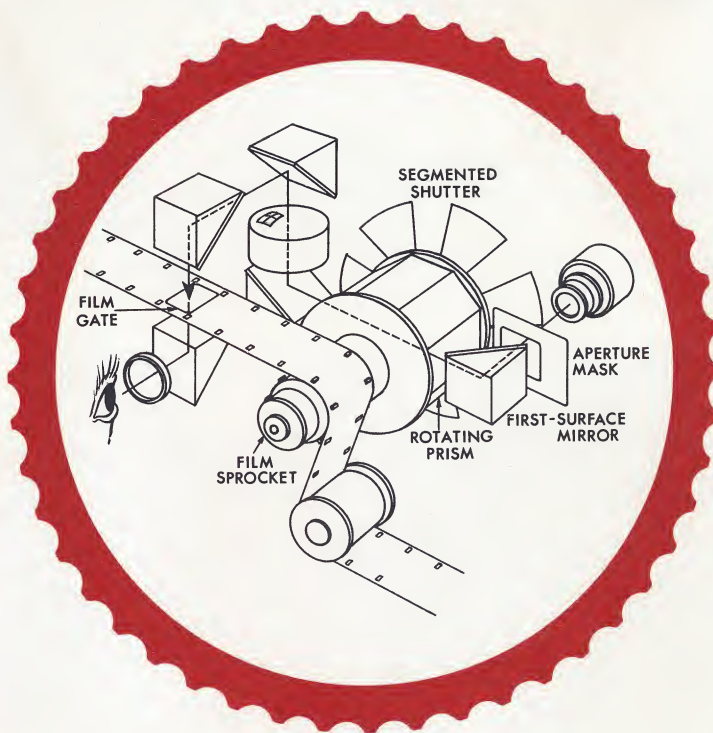

HYCAM

specifications

OPTICAL HEAD

(interchangeable with 100-, 400-, and 2,000-ft models)

Prism-Sprocket-Shutter Assembly:

(interchangeable in field)

Prism, 8-sided (standard)
 10 to 8,500 pps—16-mm full frame

Prism, 16-sided (accessory)
 20 to 17,000 pps— $\frac{1}{2}$ -frame
 16-mm or true 8-mm

Sprocket, 8-frame type, is used with both prisms

Shutter, 1/2.5 (standard)
 1/5, 1/10, 1/20, 1/50, 1/100 (accessories)

Viewing and Focusing:

Direct through-the-lens viewer and focuser

Lenses:

C-mount lenses of any focal length available (accessories)

Fiducial Marker:

Crosshairs on accessory aperture mask

Timing Lights:

One NE2J lamp for marking one side of film (standard) — second light to be added on opposite side of film (accessory)

Film Gates:

Flat, spring-loaded to accommodate various film thicknesses. Easily removable

FILM TRANSPORT

Film Capacity:

Model K1001	16-mm by 100 ft
Model K1004	16-mm by 400 ft
Model K10020	16-mm by 2,000 ft

Drive System:

Single universal motor (fused) and smooth-start centrifugal clutch handle speed range 100 to 8,500 pps. Accessory gear train covers range 10 to 300 pps

Spool Ejectors:

Fingertip controls ease the removal of film spools

Event Synchronizer:

Electrical co-ordination between starting of camera and starting of event

Cutoff Switch:

Terminates motor power at end of film, automatically

Film-Supply Spindle:

Adjustable tension

Tripod Mounting:

- 1 hole— $\frac{1}{4}$ -20 thread (steel insert)
- 3 holes— $\frac{3}{8}$ -16 thread

Specifications subject to change without notice.

ACCESSORIES

Oscillo Attachment

Adapter for putting Pentax-type lens in camera door for super-impositioning of oscilloscope trace over framing image.



Streak Attachment

Auxiliary lower gate gives slit at film plane — adjustable 0 to $\frac{3}{16}$ in. Writing rates up to 0.06 mm per μ sec. Uses oscillo attachment and lens system.

Electronic Flash

Magnetic pickup provides circuitry for synchronizing electronic flash with full-open shutter.

Slow-Speed Transmission

Gear train for speed reduction to 10 pps.



Tripod

Sturdy unit produced for Red Lake by Quick-Set. Has worm-gear elevator, geared spring loaded 90-degree tilt head, and positive locks in all positions. 13 lb.

Timing-Light Generator

Solid-state source unit for timing pulses to neon lamp in Hycam. Provides 10, 100, or 1,000 pulses per second. Inexpensive, battery or 115-v powered, 4 lb.



Exposure Meter

Ideal unit for high-speed photography is the Honeywell Spot Meter. Has an angle of acceptance of only three degrees. Reads directly in camera settings.



Lens Auxiliaries

Extension tubes designed in various lengths for c-mount lenses. Also lens adapters for using special-mount lenses on Hycam.

SPEED-CONTROL EQUIPMENT

D-C Power Supply

Full-wave 6-amp solid-state rectifier unit with 115-v 50/60 cps input, 0 to 110-v d-c output. Varies framing rate of standard Hycam over range 100 to 4,000 pps; with Slow-Speed Transmission, 10 to 300 pps.




Variable Autotransformer

Operating from 115-v 50/60-cps power gives 0 to 280-v a-c output to control standard Hycam from 500 to 6,000 pps; with Slow-Speed Transmission, 50 to 500. For higher frame rates, larger capacity autotransformers are required.

TOTAL WEIGHTS

Model K1001 (100-ft capacity)	13 lb
Model K1004 (400-ft capacity)	28 lb
Model K10020 (2,000-ft capacity)	52 lb

Red Lake Labs

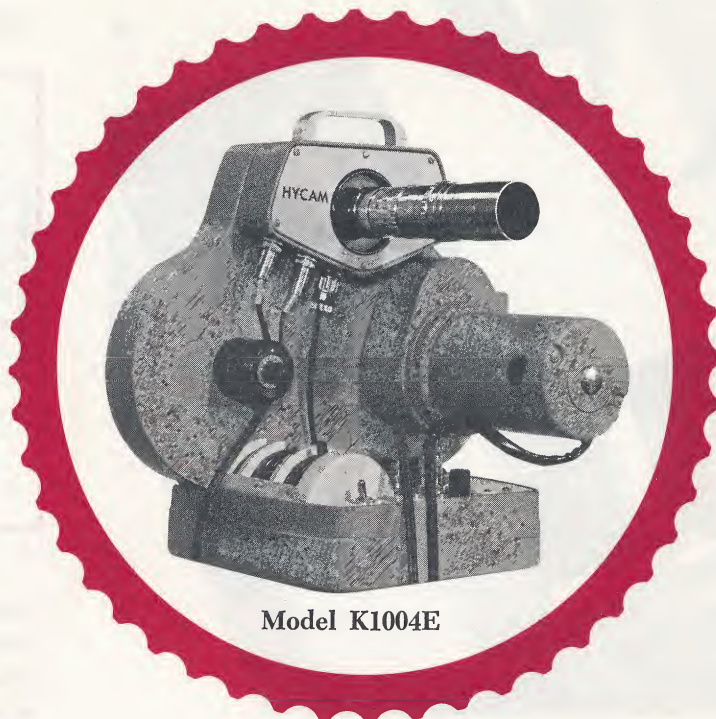

Model K1004E

HYCAM (400-ft)

16-mm high-speed motion-picture camera

Features include:

- All the basic advantages of the Hycam concept (See Red Lake Form HY-164)

plus

- 400-ft film capacity
- Special adapters to minimize film chipping with 100-ft and 200-ft film spools

- Integral electronic control (scr), which gives film speeds flat to within 1 per cent (See curves, page 2)
- Multiple run capability up to 3000 pictures per second
- External film-footage indicator to facilitate multiple runs
- Optical heads interchangeable between 100-ft. and 400-ft Hycam models


With the introduction of the 400-ft Hycam Camera, Red Lake Labs has not only added tremendous mechanical flexibility to the Hycam line, but has also provided electronic speed regulation to 1 per cent. This facilitates data reduction.

Hycam flexibility now permits the user mechanically to switch optical heads from 100-ft to 400-ft film-transport units with the simple release of three screws. To attain electronic speed regulation, the 100-ft head requires installation of the speed sensor. With the newly developed built-in electronic speed control, the speed curves are flat after acceleration. (See curves, page 2) This control regulates up to picture rates of 5000 (10,000 with $\frac{1}{2}$ -frame or 8-mm head). Above this, an external autotransformer is used.


Aside from film capacity, the inclusion of the film-footage indicator, and the built-in electronic speed control, the new 400-ft Hycam transport unit contains all the remarkable features of the earlier 100-ft Hycam Camera: such as,

- A single motor for the entire speed range 10 to 20,000 pps
- A smooth-start centrifugal clutch that does away with the need for expensive heavy external voltage-control devices.
- Fingertip film-spool ejectors
- A film compartment designed to minimize film chipping at the end of a run
- For the 400-ft model, adapters are available to permit the running of 100-ft and 200-ft film reels

more

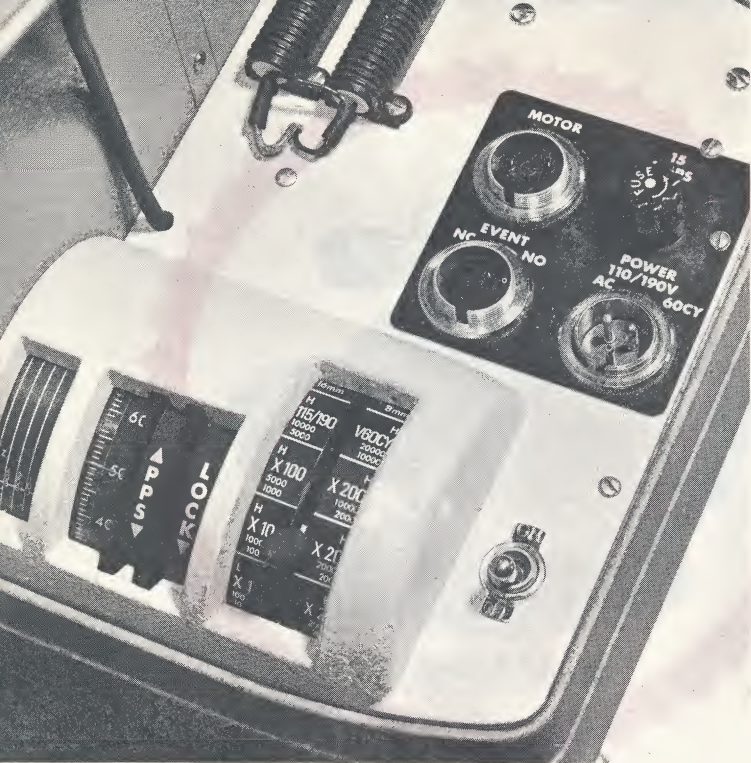

SPEED CURVES (MODEL K1004E)

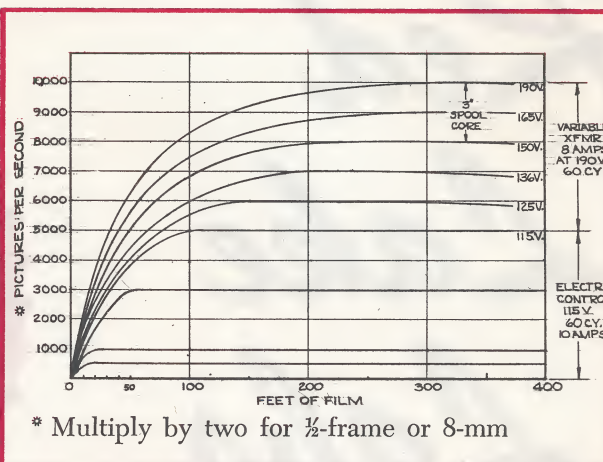

Speed-control and operating console built into Hycam base permits continuously variable fingertip control within 1 per cent of framing rates up to 5000 pps. Lock is provided to insure stability of setting during camera run

HYCAM MODEL K1004E (Continued)

- An event synchronizer and end-of-film cutoff switch built in
- Direct through - the - lens viewing and focusing facilities with dark slide and external shutter positioner.

The famous Hycam optical head* has

- Interchangeable rotating prisms to give ½-frame 16-mm or true 8-mm pictures
- A flat film gate for uniform resolution
- Interchangeable shutters permitting exposures as short as 1 microsec with full- or ½-frame 16-mm, or 0.5 microsec with 8-mm
- Convenient mounting for all C-mount lenses
- The ability to install special aperture masks for fiducial markers
- Double timing lights
- A single shaft carrying the segmented shutter, the film sprocket, and the rotating prism. This eliminates gearing with its backlash problems

*(for Details see Red Lake Form HY-164)

ORDERING INFORMATION

- Model K1004E** Hycam High-Speed Motion-Picture Camera, 16-mm x 400-ft, with electronic speed control, with framing rate variable from 100 to 10,000 pps
- Model K10S4E** Hycam High-Speed Motion-Picture Camera, 16-mm x 400-ft, with electronic speed control, with low-speed transmission to give framing rates variable, 10 to 10,000 pps
- Model K1004AE** Hycam High-Speed Motion-Picture Camera, 16-mm x 400-ft, with electronic speed control, with 16-sided prism for ½-frame 16-mm or true 8-mm at framing rates variable 200 to 20,000 pps
- Model K10S4AE** Hycam High-Speed Motion-Picture Camera, 16-mm x 400-ft, with electronic speed control, with 16-sided prism for ½-frame 16-mm or true 8-mm with low-speed transmission to give framing rates variable from 20 to 20,000 pps

Red Lake Labs

PHOTO INSTRUMENTATION EQUIPMENT

Products the User Likes

2971 CORVIN DRIVE

SANTA CLARA, CALIFORNIA

(408) 739-1698

High-Speed Photography

PROBLEMS OF MOTION ARE EASILY ANALYZED WITH HIGH-SPEED CAMERAS



Above, a Hycam sequence. Framing rates range from 5 to 44,000 pictures per second.

Stretching time

In the study of rapid motion, photo-optical means have long been used to stretch the time base. This technique has made it possible to slow down action so it can be studied in detail.

An early trick in the motion-picture field was the slow-motion sequence, produced by speeding the camera up so that projection at normal speeds permitted newsreel viewers to appreciate the fine points of sporting events like diving, football, golf, etc.


In 1932, this speed range was substantially extended by the introduction of the rotating-prism type camera. In this development, the film moves through the

camera continuously and the image is transferred to the film by the action of a rotary optical element.

The Hycam contribution

Within the last two years, the world's most advanced rotating-prism type camera has appeared on the engineering scene and radically expanded the area of usefulness assigned to it. Going back to fundamentals, the engineers of Red Lake Laboratories Inc. used their career-long experience in high-speed photo instrumentation to refine and develop the essentially simple Hycam. In its present advanced form, Hycam exhibits the following three outstanding characteristics:

- Best picture quality by far ever produced with a rotating-prism camera (resolution—68 lines per millimeter vertically and horizontally)
- The greatest range of speeds ever available in the rotating-prism camera field (5 to 44,000 pictures per second)
- The lowest first cost, model for model, and the most economical operation, service, and maintenance.

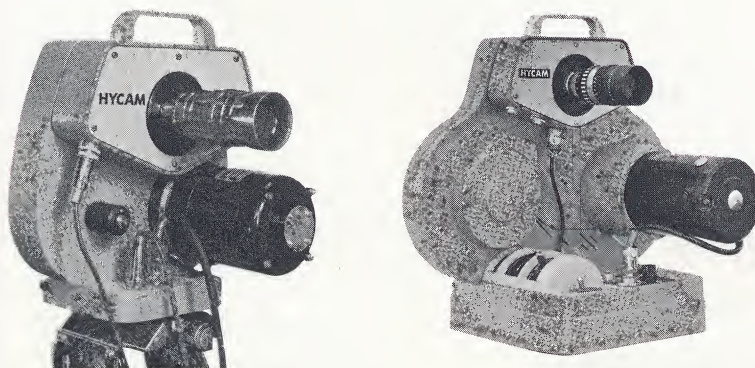

100-ft.-film-capacity Hycam—weight 13 lb 400-ft.-film-capacity Hycam—weight 30 lb

more ➤

HIGH-SPEED PHOTOGRAPHY (continued)

Simplicity, ease of use, and versatility permit Hycam to be used in the laboratory by scientists, engineers, or photographers. Hycam is so designed that the following features can be added for special problems:

CINE-OSCILLOGRAPHY

In the study of mechanical equipment having electrical functions, it is often desirable to coordinate the two aspects in analysis. Replacement of the Hycam focusing eyepiece with an accessory lens permits superimposition of oscilloscope traces over the framing images on the film.

STREAK PHOTOGRAPHY

By replacement of the Hycam lower film gate, an


auxiliary attachment gives a slit at the film plane, adjustable from 0 to 3/16 of an inch. This permits streak photography at writing rates up to 0.08 millimeters per microsecond.

TIME-LAPSE PHOTOGRAPHY

Addition of a simple auxiliary device to Hycam permits successive exposures, individually initiated by electrical input signals at rates as low as desired. Used to speed up the action of imperceptible events.


SELF-PROJECTION

Auxiliary projection-lamp assembly converts Hycam into a projector capable of displaying any of the types of films taken by Hycam.

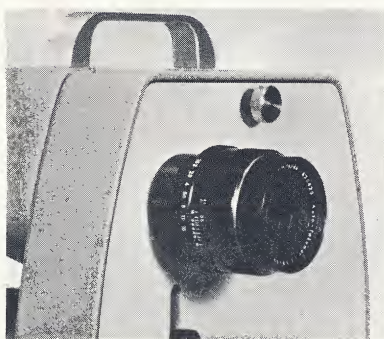


Oscillo Attachment

This shows the manner in which a Pentax-type lens is adapted to the camera door for cine-oscillography as described above. Weight 1 lb.

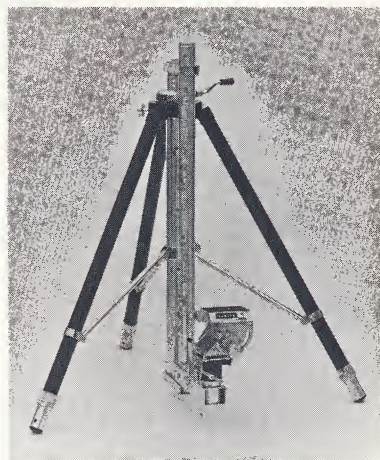

Tripods

Special tripods are available for low and high mounting of both Hycam cameras in the field. Weights 13 and 27 lb.

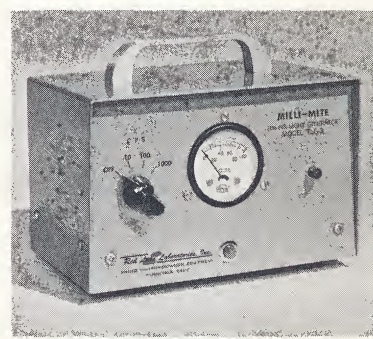

Timing Light Generator

Solid-state unit delivers timing pulses to neon lamp built into Hycam for putting time-base pips on the film. Operates from battery or 115-v a-c power. Weight 4 1/2 lb.




Exposure Meter

Red Lake recommends the Honeywell Pentax 1°/21° Exposure Meter, which has an angle of acceptance of only one degree and gives camera settings directly from light-level readings. Weight 18 ounces.



VISIT BOOTH 1024

Los Angeles Sports Arena
October 4-7, 1965

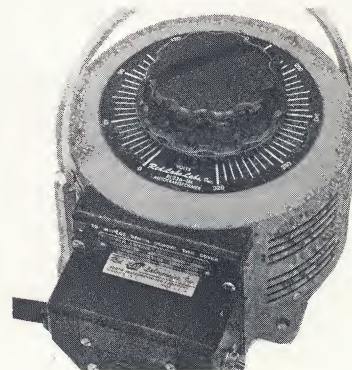

Power Supply

Variable autotransformer, 115-v a-c input, 0- to 320-v a-c output, controls both 100-ft and 400-ft Hycam models up to their top rated speeds. Weight 24 lb.

Red Lake Labs, Inc.

PHOTO INSTRUMENTATION EQUIPMENT



Products the User Likes

2971 CORVIN DRIVE

KIFER INDUSTRIAL PARK


SANTA CLARA, CALIFORNIA 95051

(408) 739-1698

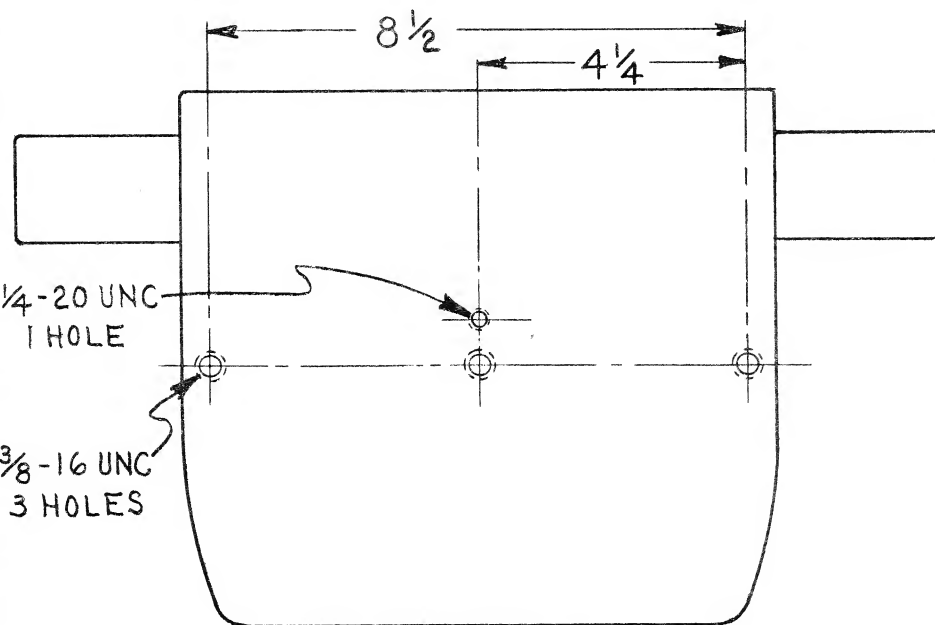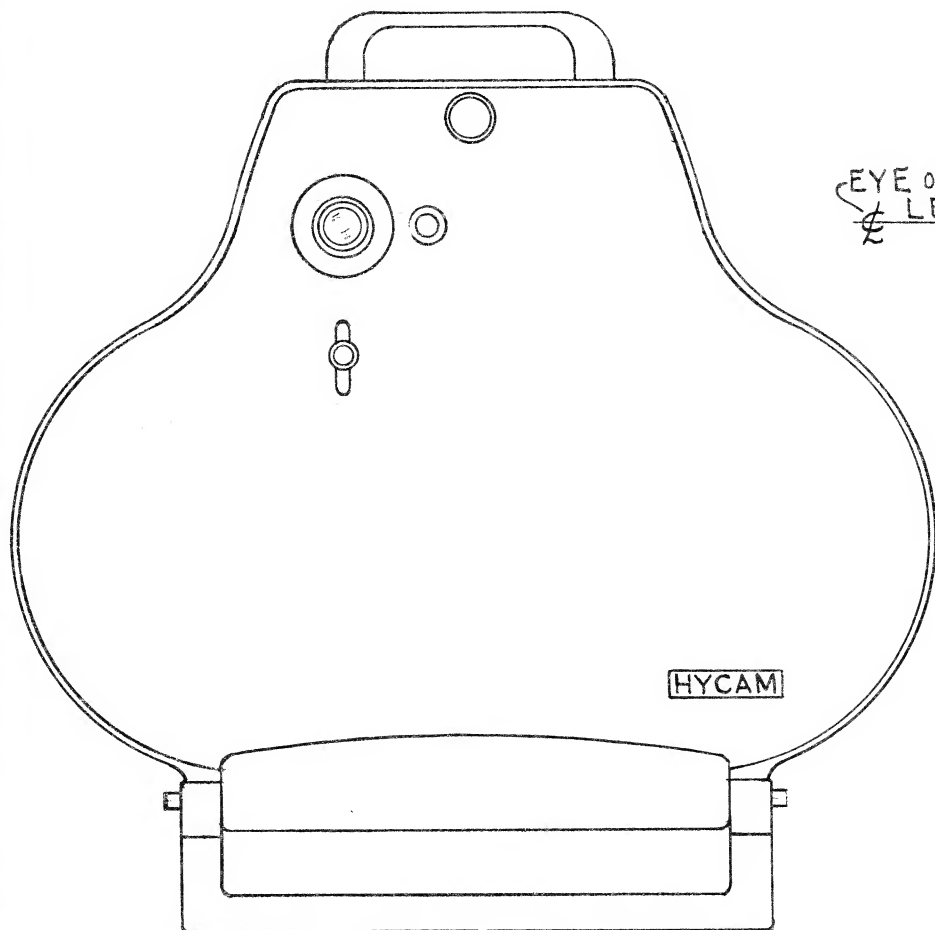

EYE OR OSCILLO.
LENS

11 1/4

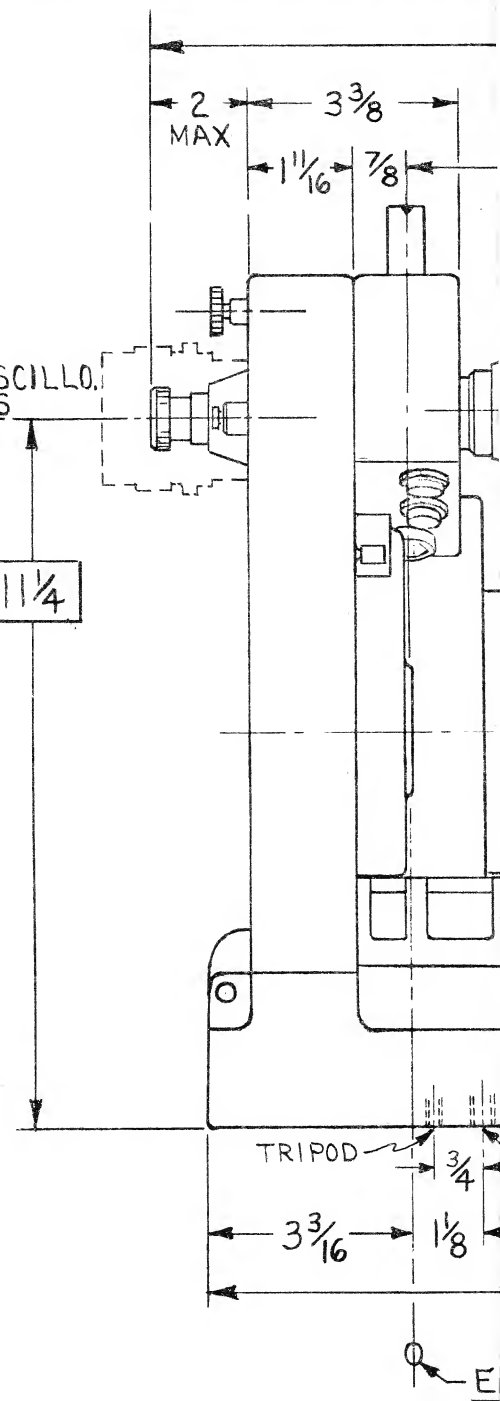


					DR
					TC
					1/8
					1/4
					1/2
					3/4
					UF
					DR
					CH
SUB ASSY	QTY	FINAL ASSY	QTY		EN

40249

CHG
A

CHG	E.O.	BY	CHK	DATE
A	ORIG.REL	BAR		5-26-65

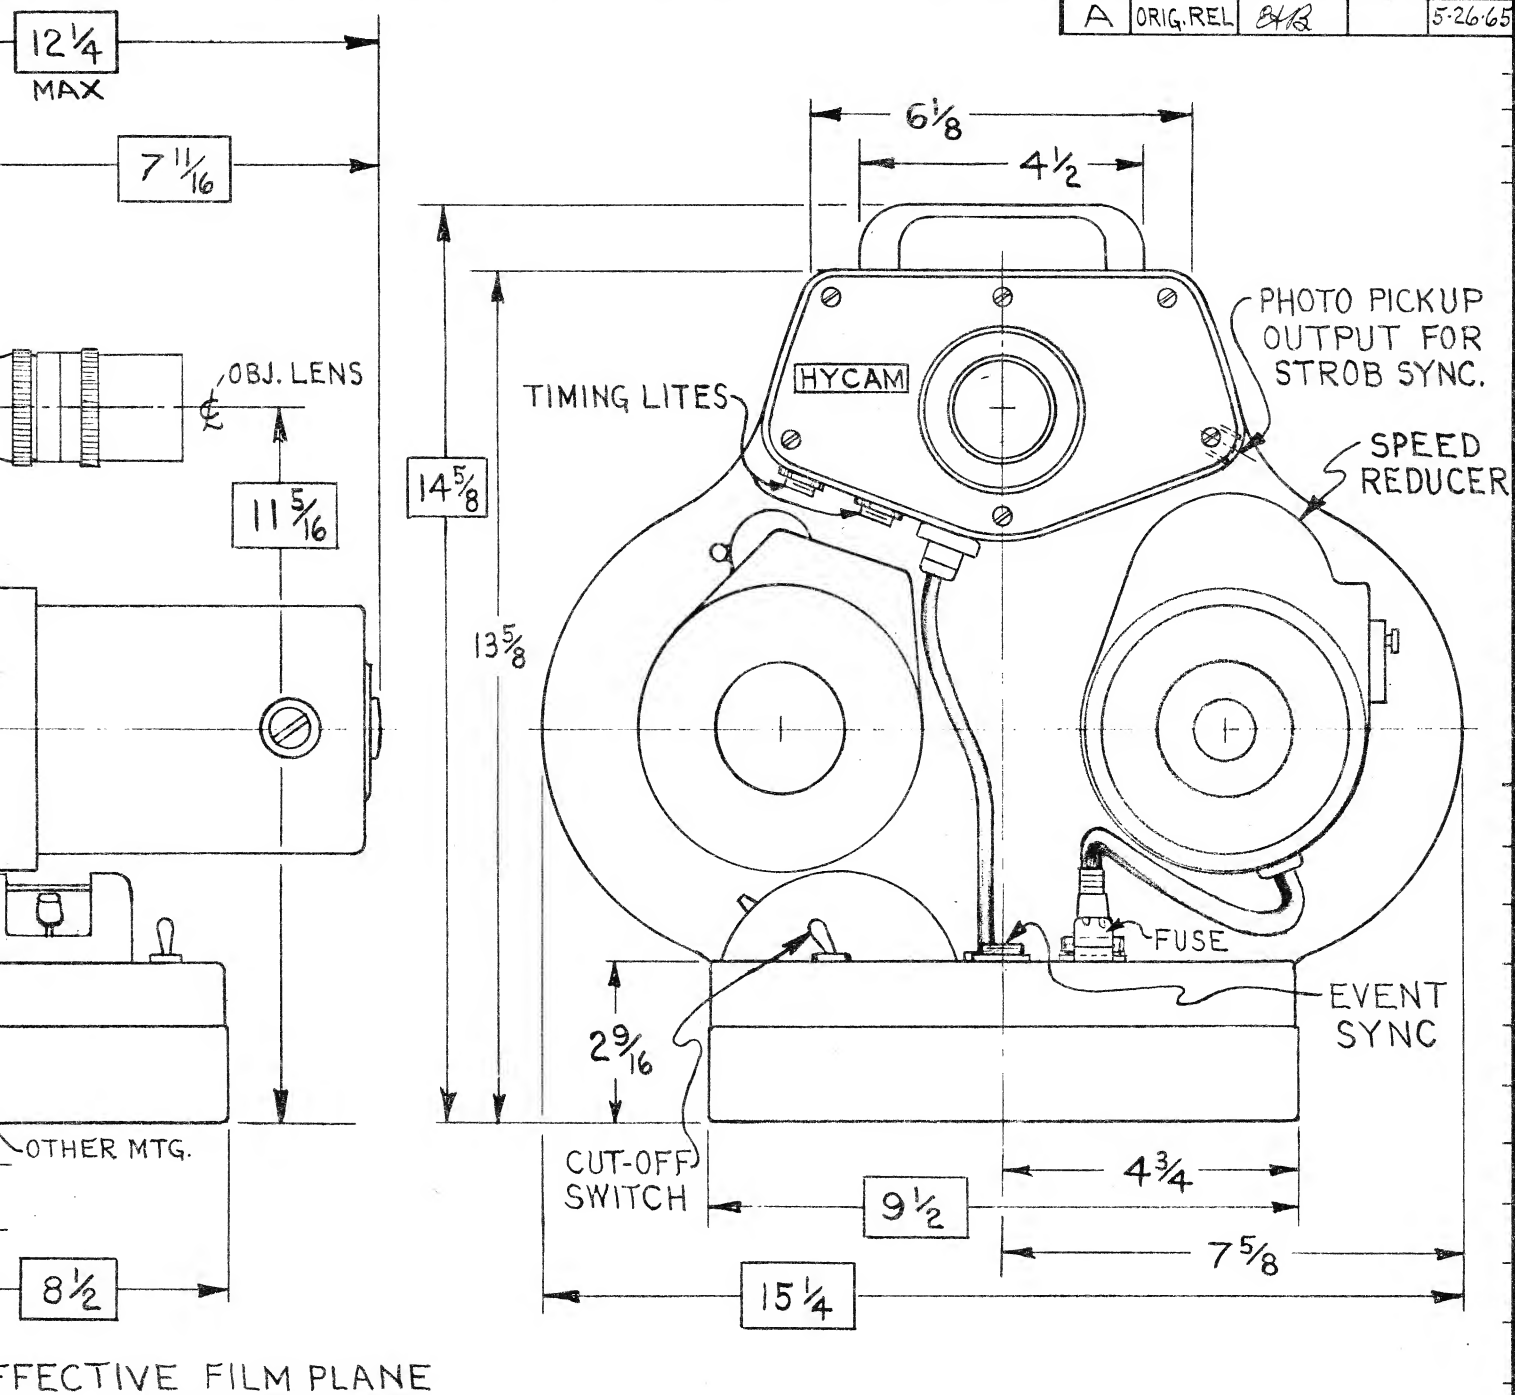

ITEM	PART NO.	DESCRIPTION	QTY
INCH TOLERANCES UNLESS OTHERWISE NOTED ALL HOLES -.000 +.002 +.004 +.006 +.008 +.010 BREAK EDGES & CORNERS .005/.010 THDS = UN CLASS 2A OR 2B DO NOT SCALE PRINT X ±.020 .XX ±.010 .XXX ±.005 FRACT. ± — ANGULAR ± CONCENT. T.I.R. MACH. SURF. 63 MAX. FILL. R			
		Red Lake Labs, Inc.	
		PHOTO INSTRUMENTATION EQUIPMENT	
		WEIGHT, APPROX. 30 LBS	
		NOTE: STD CAMERA DIMS SHOWN	SCALE 1/3
		SUBJECT TO CHANGE WITHOUT NOTICE	FIRST USED ON MODEL K2004E
		OUTLINE DRAWING	SHEET 101
		MODEL K2004E HYCAM (400')	CHG
			A

Ed Breda 5-26-65 ENG

APV

EMMO 6-1-65 APV



3/8-16 UNC
3 HOLES

SUB ASSY	QTY	FINAL ASSY	QTY	DRN
FIRST USED ON MODEL (JOB) No:				CHM
				ENG

40010

CHG

A

CHG

E. O.

BY

CHK


DATE

A

ORIG. REL.

EMW

4-17-64

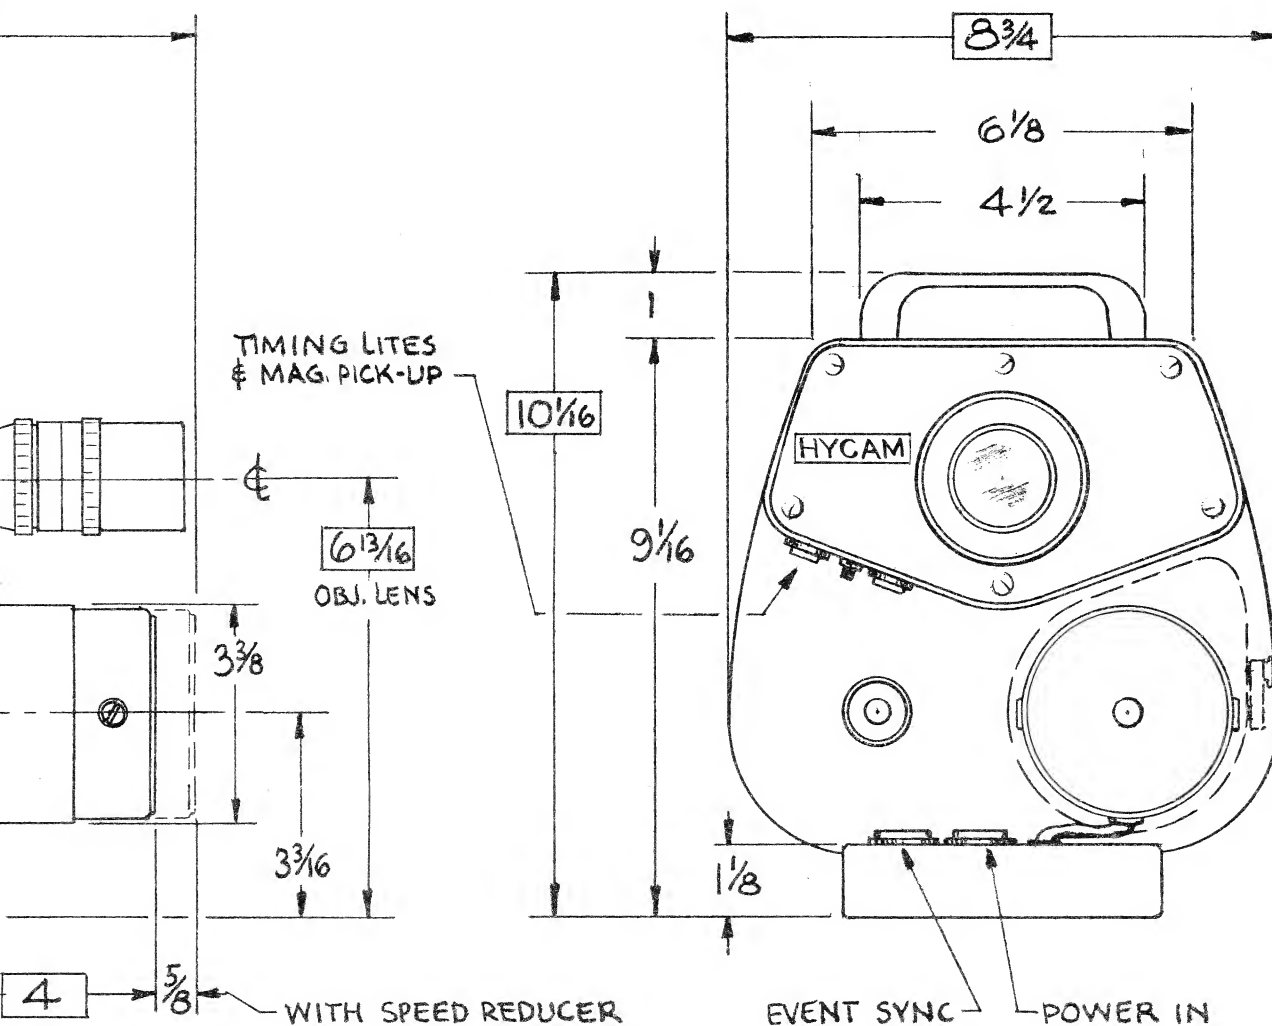

EFFECTIVE FILM PLANE

WEIGHT APPROX. 13 LBS

ST'D CAMERA DIM'S SHOWN - SUBJECT TO CHANGE
WITHOUT NOTICE

				ITEM	PART NO	DESCRIPTION	QTY
INCH TOLERANCES UNLESS OTHERWISE NOTED				FIN: —		Red Lake Laboratories SANTA CLARA, CALIF.	
X ± .050		ANGULAR ± °	T.I.R.				
X X ± .020		CONCENT.	H.T.: —				
X X X ± .005		MACH. SURFACES	✓ 63 R.				
RACT. ± —		MAX. FILLET	MAT'L: —		This document contains proprietary information and is tendered subject to the conditions that the information (A) be retained in confidence. (B) Not be reproduced or copied in whole or in part and (C) not be issued or incorporated in any product, except under an express written agreement		
BREAK EDGES AND CORNERS .005— .020							
DO NOT SCALE THIS DRAWING							
7. Flc		4-17-64	APV	OUTLINE DWG —		40010	CHG A
			APV				
EMW		4-17-64	SCALE 1/3	MDL'S K2001 & K2001A HYCAM (100')			

Red Lake Laboratories

INCORPORATED

PHONE 739-1698
AREA CODE 408

PHOTO INSTRUMENTATION EQUIPMENT

2971 CORVIN DRIVE
SANTA CLARA, CALIFORNIA

Gentlemen:

We appreciate your interest in our HYCAM.

We are enclosing technical literature, prices, and a special announcement (pink sheets) about our new optical system.

I would suggest that you go over the pink sheets thoroughly, which gives you the condensed version of the technical literature. It says that we have accomplished more in three years, advancing the technology of rotating prism cameras, than has been accomplished by all of the other manufacturers since 1932 when the Eastman Kodak camera was introduced. We, of course, are extremely proud of this advance. Rotating prism cameras had a reputation for producing poor picture quality. The new optical system in HYCAM clearly indicates that there is now no basis for that reputation.

In analyzing the prices of the camera and its accessories, you will notice that the prices are about one half of any of our competitors in spite of this major break-through in optical quality.

In many areas of the world we have representatives. They can assist you whenever you want them. Please feel free to call on the representative or us at anytime.

Sincerely,

Robert D. Shoberg
Robert D. Shoberg
President

RDS/ld
Enc.

Red Lake Labs REPRESENTATIVE:

Photographics Analysis
190 Alps Road
Wayne, New Jersey, 07470

RED LAKE LABS., INC.
2971 Corvin Drive
SANTA CLARA, CALIFORNIA (95051)
(Area Code 408)739-1698

NEW OPTICAL QUALITY

HYCAM 16MM HIGH SPEED MOTION PICTURE CAMERAS

ROTATING PRISM TYPE

The basic difference between the HYCAM design and all other rotating prism camera designs is that all gears have been removed from the optical system and the rotating prism and film sprocket have been placed on one shaft.

A further improvement has been made by adding a segmented disc shutter to this shaft. This technique eliminates gear backlash and bearing run out which improves the steadiness and the optical quality of the film. An 8 sided rotating prism is used in the full frame 16mm and a 16 sided rotating prism is used in the 1/2 frame 16mm or 8mm cameras. These greater number of sides minimize the angular rotation of the prism during a given exposure. This greatly enhances the picture quality because of its superior optical compensation over the standard 4 sided prism camera such as all other manufacturers use.

The current HYCAM cameras basically consist of two models, a 100' model and a 400' model.

HYCAM is so designed that the main optical parts are contained in a removable optical head which can be interchanged from model to model and from unit to unit. A speed sensor is installed in all 400' optical heads. If a 100' optical head is to be used with the 400' model, the speed sensor must be installed in it at the factory. The speed sensor does not interfere in any way with its operation when used with the 100' model. It costs \$60.00 to have the speed sensor installed in the 100' optical head.

Both standard models have a minimum frame rate of 100 frames per second.

Both models can be reduced to ten frames per second by having a speed reducer added at the factory as an accessory. The speed reducer does not in any way interfere with the operation of the camera at the higher frame rates. The speed reducer can be changed from high to low range by merely shifting a lever.

Both models can be easily changed from a full frame 16mm to 1/2 frame 16mm or a true 8mm. Two methods can be used to change from the full frame 16mm to the 1/2 frame 16mm or 8mm:

1. Change the complete optical head. This requires about two minutes time and the 1/2 frame optical head costs \$955.00.
2. You can change the prism/shutter/sprocket shaft in the field. This requires thirty minutes time and the 16 sided prism/shutter/sprocket shaft assembly costs \$450.00. No special mechanical skills are necessary for this operation.

SPECIAL FEATURES

All models include the smooth start centrifugal clutch.

All models contain a built-in power cut-off switch.

All models include a built-in event synchronizer.

All models include a flat spring loaded film gate.

All models have interchangeable shutters making it possible to change the shutter speed without changing the frame rate. This can be done quickly in the field. The minimum shutter speed with the full frame 16mm or the 1/2 frame 16mm is one microsecond, as a .5 microsecond with the true 8mm.

The 1/2.5 shutter is supplied as standard with all model cameras. Shutters available for the full frame 16mm models are: 1/2.5, 1/5, 1/10, 1/20, 1/50, 1/100. Other sizes are available on special order down through the 1/100. All of the above sizes are available for the 1/2 16mm, excepting the 1/100. All of the above shutters are available for the 8mm, including the 1/100.

There is no reduction in frame height with the higher ratio shutters.

To determine the shutter speed at a given frame rate with a given ratio shutter, use this shutter speed formula: $SS = 1/\text{ratio} \times \text{FPS}$.

EXAMPLE

$$\frac{1}{2.5 \times 1000} = \frac{1}{2500} \text{ sec.}$$

(This is true for all models.)

NEW IMPROVED OPTICAL SYSTEM

The model K1 has been discontinued. The model K2 HYCAM will be available January 15, 1965. The major changes are as follows:

1. Right angle prisms have been substituted for all front surface mirrors.
2. The one field lens has been substituted for two field lenses.
3. The relay lens has been completely redesigned to transmit more light, give a higher resolution and a flatter field on the film.

The new internal optics are so superior to the old optics that superior objective lenses show an improved quality on the film over routine objective lenses.

C MOUNT LENSES ARE STILL USED

The maximum effective aperture is f/2.8. The transmission loss through the system is 1/2 stop. This requires a 1/2 stop wider lens setting than normal. All HYCAM models in the field can be modernized with the new optics for approximately \$200. The price on all K2 models has been increased by \$120 over the old K1 models, because of the higher cost of the new optics.

The optical resolution with a good objective lens with a plus X type film is as follows:

Center 68 lines/mm vertical and horizontal

Edges 56 lines/mm vertical and horizontal

We believe this resolution to be the highest of any of the rotating prism cameras on the market today. The frame rate has no effect on resolution. These numbers should be obtained at all speeds commensurate with good photographic practices.

POWER SUPPLIES NEEDED

DC is needed for all standard 100' models for frame rate below 1000 fps. DC can be used throughout the entire speed range. However, above 1000fps it is customary to use AC. We have available a 4 lb. DC rectifier that operates the 100' model from its minimum frame rate to 5000fps for the full frame 16, (10,000fps for the 1/2 frame 16 or 8mm). (Price, \$112.50) For the top frame rates on the 100' models, RL236-1M is recommended.

AC is used throughout the entire speed range for the 400' models. An electric speed control, built into the camera base, is used from the minimum frame rate to 5000 (or 10,000fps with the 1/2 frame 16 or 8mm). Speed setting dials are used. The film accelerates to the desired speed in a minimum length of time and the electronic control regulates the frame rate within one percent. Above the 5000fps (or 10,000fps), the electronic speed control is neutralized by a switch provided and our model RL236-1M is recommended. 195V AC results in 10,000fps (or 20,000fps for the 1/2 frame or 8mm version). (See speed curves.)

CURRENT MODELS AVAILABLE

<u>MODEL NO.</u>	<u>FRAME RATES</u>	<u>CAPACITY</u>	<u>PRICE</u>
K2001	100 to 8500fps	16mm x 100'	\$1295.00
K20S1	10 to 8500fps	16mm x 100'	\$1445.00
K2001A	200 to 17,000fps	1/2 frame 16mm or 8mm x 100'	\$1445.00
K20S1A	10 to 17,000fps	1/2 frame 16mm or 8mm x 100'	\$1595.00
K2004E	100 to 10,000fps	16mm x 400'	\$2330.00
K20S4E	10 to 10,000fps	16mm x 400'	\$2580.00
K2004AE	200 to 20,000fps	1/2 frame 16mm or 8mm x 400'	\$2480.00
K20S4AE	20 to 20,000fps	1/2 frame 16mm or 8mm x 400'	\$2730.00

SEE PRICE LISTS FOR ALL DETAIL PRICES

EXPLANATION OF MODEL NUMBERS

K2 denotes new optical quality.

1 denotes 100' capacity.

4 denotes 400' capacity.

S denotes speed reducer

E denotes electronic speed control
unit installed in base of camera.

A denotes 1/2 frame 16mm or 8mm.

ALL MODEL NUMBERS INDICATED ABOVE INCLUDE SPECIFICATIONS LISTED IN PRICE LIST
DATED JANUARY 1, 1965.

* * * * *

FULLY GUARANTEED

90-DAY GUARANTEE: If, for any reason,
you are not completely satisfied with
any Red Lake product within 90 days,
you may return it for full credit.

ONE-YEAR GUARANTEE: Covers any defect
in workmanship or material.